


Applications:

➤ Light Commercial ➤ Residential ➤ Agricultural

Our corrugated panels are known for their durability and versatility. From large agricultural projects to simple DIY projects, this product is perfect for function and design. Corrugated roofing is an exposed fastener panel with a Galvalume substrate in 24" coverage.

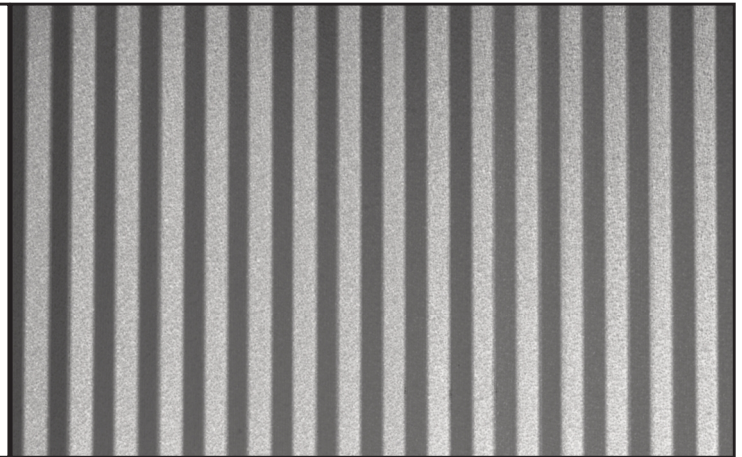

Kentucky

925 Rolling Hills Lane
Winchester, KY 40391
Phone: (859) 744-4475
Fax: (859) 744-4324

N. Kentucky

13113 Apex Dr.
Walton, KY 41094
Phone: (859) 485-1928
Fax: (859) 485-1083


Illinois

1181 State Route 121
Mt. Zion, IL 62549
Phone: (217) 864-5835
Fax: (217) 864-2297

Ohio

4799 Salem Ave.
Dayton, OH 45416
Phone: (937) 503-2457
Fax: (937) 275-9812

CORRUGATED

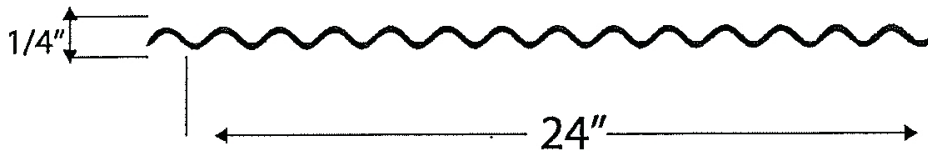

GENERAL INFORMATION

Slope: Minimum recommended roof slope is 3:12.

Coverage: 24" coverage with 1/4" rib height.

Length: Minimum recommended cut length is 1'-0". Maximum is 20'-0". *Longer panels need special consideration for erection, packaging, and shipping.*

Substructure: Designed for use over a solid substrate or open structural framing at 24" O.C. *Uniform and properly aligned substructures are necessary to avoid distortion.*

Gauge: Available in 29 gauge and 26 gauge.

Fasteners: Exposed fastener product. Contact your representative for assistance in choosing the proper fastener for your project.

*All panels are subject to surface distortion when fasteners are improperly applied. Fasteners that are over-driven will cause stress across the face of the panel at or near the point of fastening.

- 24" coverage
- 1/4" rib height
- 1 1/4" spacing between corrugations
- Galvalume substrate
- Traditional design
- Complete line of accessories
- Minimum roof slope: 3:12
- Installs over open or solid substrate
- Can be installed horizontally or vertically

